

DC Input, Schmitt Trigger Photo Coupler

Description

The SLH11LX series combine an AlGaAs infrared emitting diode as the emitter which is optically coupled to a Schmitt Trigger detector in a plastic DIP6 package with different lead forming options.


Features

- High isolation 5000 VRMS
- DC input with Schmitt trigger output
- Operating temperature range - 55 °C to 100 °C
- REACH & RoHS compliance
- MSL class 1
- Regulatory Approvals
 - UL - UL1577
 - VDE - EN60747-5-5(VDE0884-5)
 - CQC - GB4943.1, GB8898
 - cUL- CSA Component Acceptance Service Notice No. 5A

Applications

- Logic to logic isolator
- Programmable current level sensor
- Line receiver – eliminate noise and transient problems
- AC to TTL conversion – square wave shaping
- Digital programming of power supplies
- Interfaces computers with peripherals


SCHEMATIC

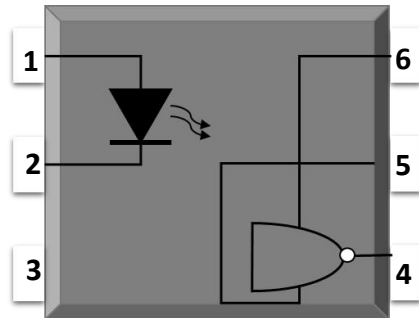


PIN DEFINITION

1. Anode	6. VCC
2. Cathode	5. GND
3. NC	4. VOUT

PACKAGE OUTLINE

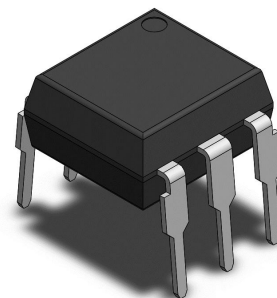

DIP-6 SLH11Lx



SMD-6 SLH11LxS

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT	Note
INPUT				
Forward Current	IF	60	mA	
Peak Transient Current	IF(trans)	1	A	1
Reverse Voltage	VR	6	V	
Input Power Dissipation	PI	120	mW	
OUTPUT				
Supply Voltage	VCC	3 to 16	V	
Output Voltage	VO	0 to 16	V	
Output Current	IO	50	mA	
Output Power Dissipation	PO	150	mW	
COMMON				
Total Power Dissipation	Ptot	250	mW	
Isolation Voltage	Viso	5000	Vrms	2
Operating Temperature	Topr	-55~100	°C	
Storage Temperature	Tstg	-55~150	°C	
Soldering Temperature	Tsol	260	°C	3

Note 1. $\leq 1\mu\text{s}$ P.W,300pps

Note 2. AC For 1 Minute, R.H. = 40 ~ 60%

Note 3. For 10 seconds

ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
INPUT							
Forward Voltage	V _F	-	1.24	1.5	V	I _F =10mA	
Reverse Current	I _R	-	-	10	μA	V _R =5V	
Input Capacitance	C _{in}	-	60	-	pF	V=0, f=1MHz	
OUTPUT							
Operation Voltage Range	V _{CC}	3	-	15	V		
Off State Supply Current	I _{CC(off)}	-	1.6	5	mA	I _F =0mA, V _{CC} =5V	
On State Supply Current	I _{CC(on)}	-	1.6	5	mA	I _F =10mA, V _{CC} =5V	
High Level Output Current	I _{OH}	-	-	100	μA	I _F =10mA, V _{CC} =V _O =15V	
TRANSFER CHARACTERISTICS (Ta=-40 to 85°C)							
Low Level Output Voltage	V _{OL}	-	0.35	0.6	V	V _{CC} =5.5V, I _F =5mA, V _E =2.0V, I _{CL} =13mA	
Turn On Threshold Current	SLH11L1	I _{Fon}	-	-	1.6	V _{CC} =5V, R _L =270Ω	
	SLH11L2		-	-	10		
	SLH11L3		-	-	5		
Turn Off Threshold Current	I _{Foff}	-	1	-	mA	V _{CC} =5V, R _L =270Ω	
Turn On Time	t _{on}	-	-	4	μs	V _{CC} =5V, I _F =I _{Fon} , R _L =270Ω	
Fall Time	t _r	-	0.1	-	μs		
Turn Off Time	t _{off}	-	-	4	μs		
Rise Time	t _r	-	0.1	-	μs		
Data Rate		-	1	-	MHz		
Isolation Resistance	R _{iso}	10 ¹²	10 ¹⁴	-	Ω	DC500V, 40 ~ 60% R.H.	
Floating Capacitance	C _{IO}	-	0.3	1	pF	V=0, f=1MHz	

CHARACTERISTIC CURVES

Fig.1 Forward Current vs. Forward Voltage

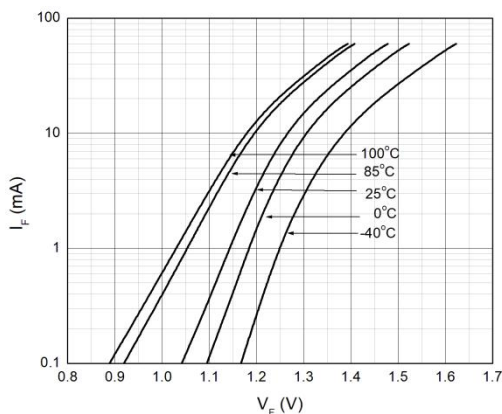


Fig.2 Output Voltage vs. Forward Current

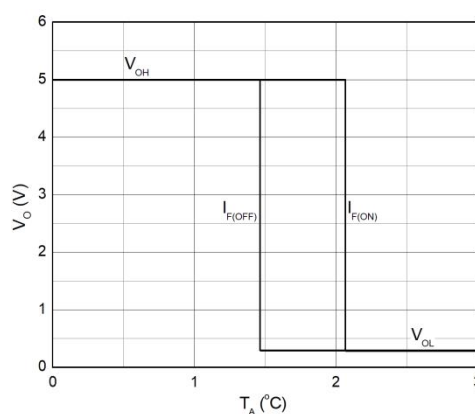


Fig.3 Normalized Turn on Threshold Current vs. Supply Voltage

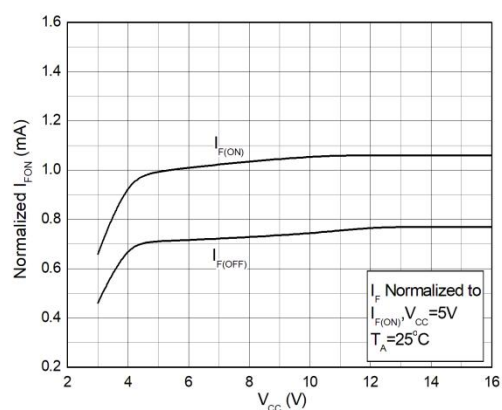


Fig.4 Normalized Turn on Threshold Current vs. Ambient Temperature

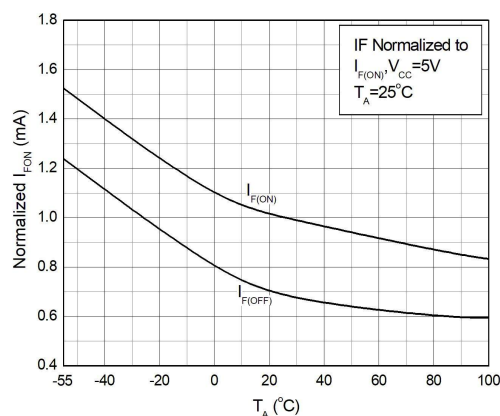


Fig.5 Low Level Output Voltage vs. Load Current



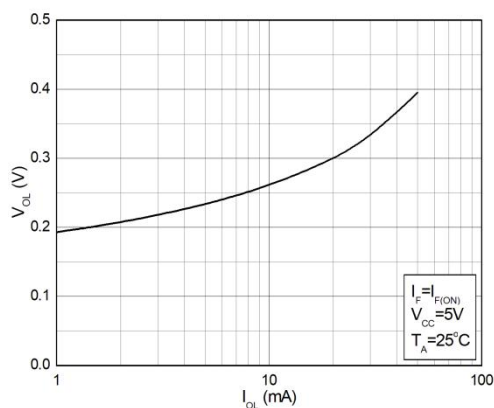


Fig.6 Supply Current vs. Supply Voltage

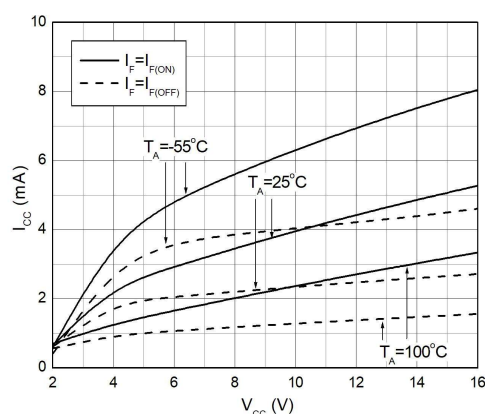


PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

Standard DIP – Through Hole (DIP-6 Type)

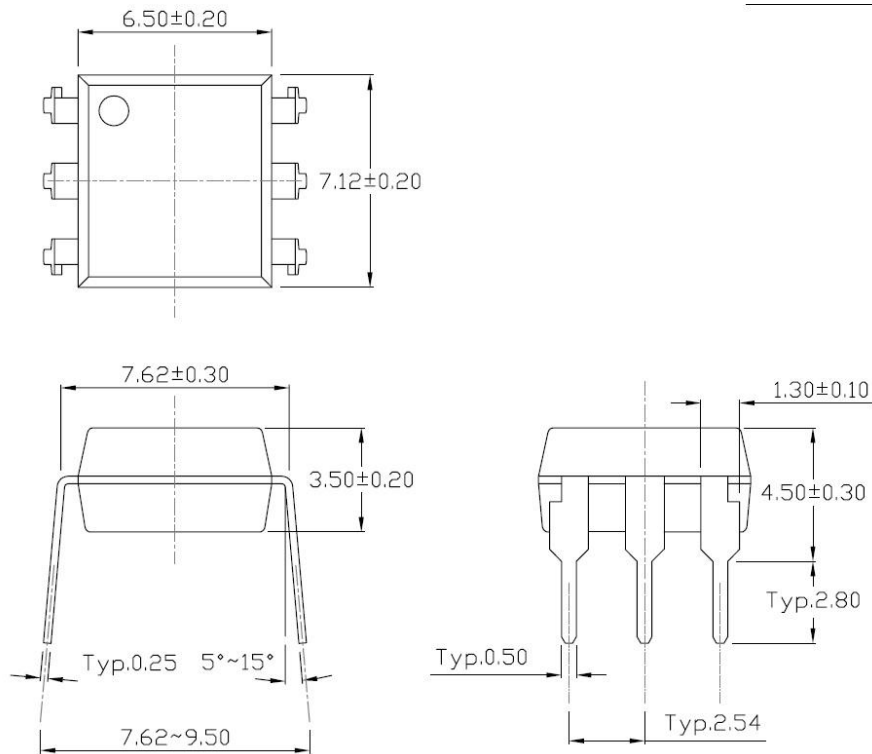


Surface Mount (Low Profile) Lead Forming (SMD-6 Type)

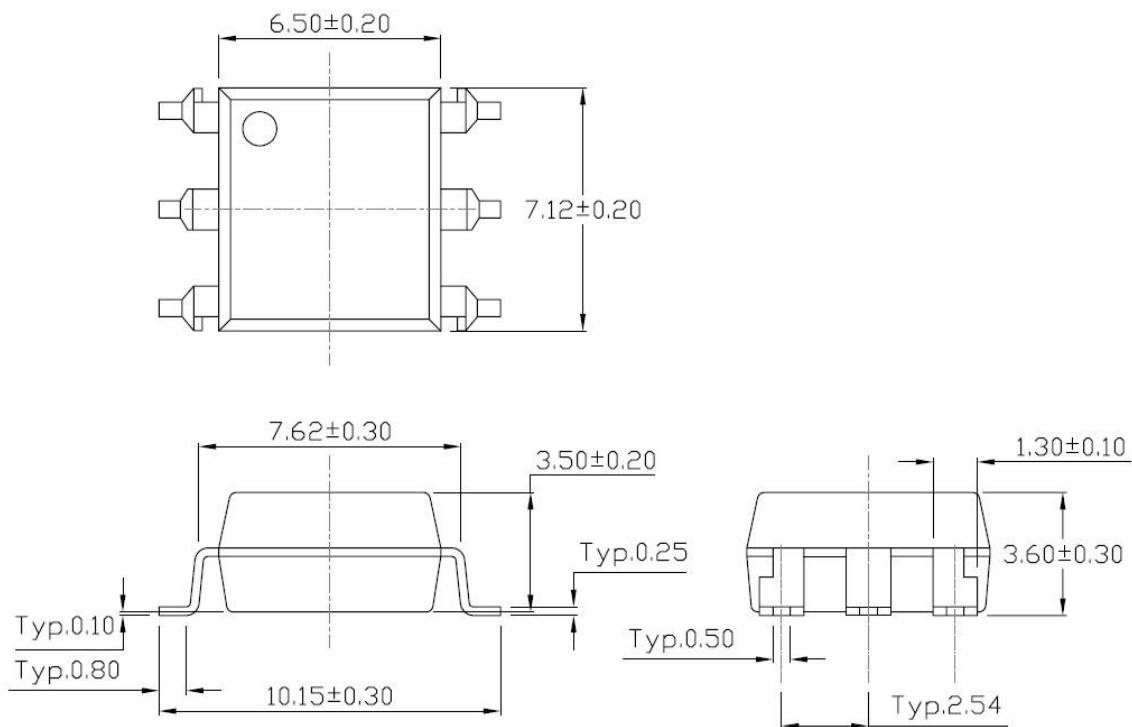


RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming & Surface Mount (Low Profile) Lead Forming

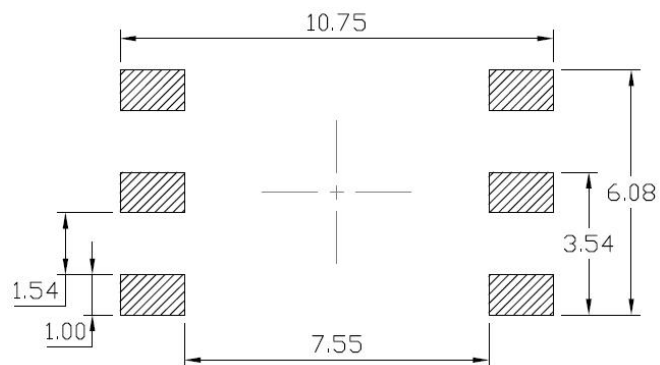


Surface Mount (Gullwing) Lead Forming

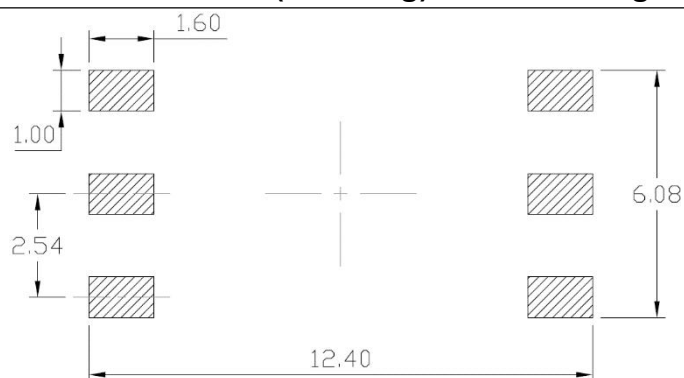

REFLOW INFORMATION

REFLOW PROFILE

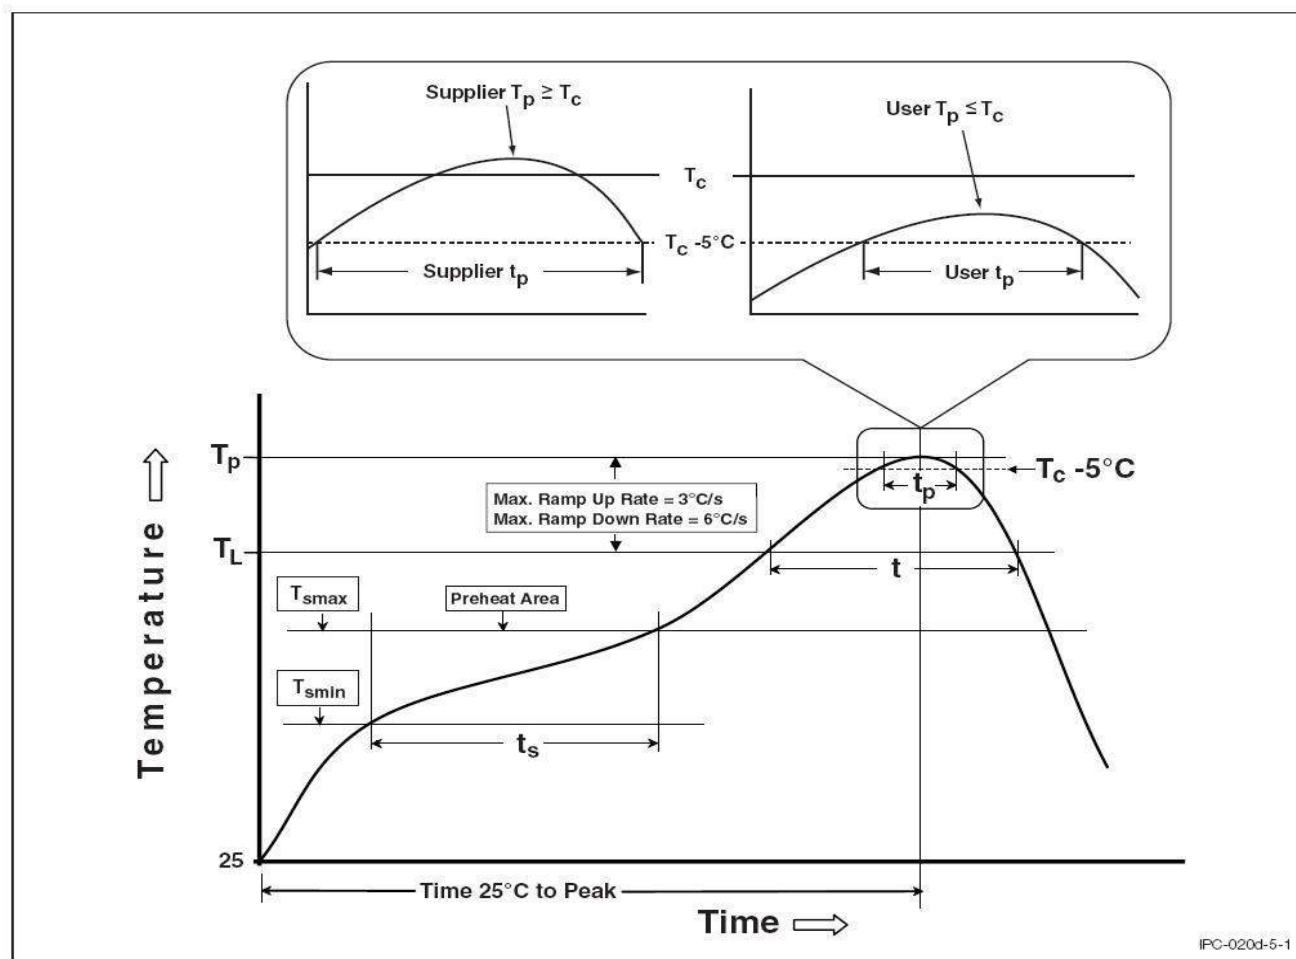

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (T _{smin})	100	150°C
Temperature Max. (T _{smax})	150	200°C
Time (t _s) from (T _{smin} to T _{smax})	60-120 seconds	60-120 seconds
Ramp-up Rate (t _L to t _P)	3°C/second max.	3°C/second max.
Liquidous Temperature (T _L)	183°C	217°C
Time (t _L) Maintained Above (T _L)	60 – 150 seconds	60 – 150 seconds
Peak Body Package Temperature	235°C +0°C / -5°C	260°C +0°C / -5°C
Time (t _P) within 5°C of 260°C	20 seconds	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max	6°C/second max
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.